



# QuickSwap Smart Contract, Code Review and Security Analysis Report

---

Customer: QuickSwap  
Prepared on: 13th January 2022  
Platform: Polygon  
Language: Solidity

[rdauditors.com](https://rdauditors.com)

---

## Table of Contents

<b>Disclaimer</b>	<b>2</b>
<b>Document</b>	<b>3</b>
<b>Introduction</b>	<b>4</b>
<b>Project Scope</b>	<b>5</b>
<b>Executive Summary</b>	<b>6</b>
<b>Code Quality</b>	<b>6</b>
<b>Documentation</b>	<b>8</b>
<b>Use of Dependencies</b>	<b>9</b>
<b>AS-IS Overview</b>	<b>10</b>
<b>Code Flow Diagram - QuickSwapRouter</b>	<b>12</b>
<b>Slither Results Log</b>	<b>13</b>
<b>Solidity Static Analysis</b>	<b>15</b>
<b>Severity Definitions</b>	<b>21</b>
<b>Audit Findings</b>	<b>22</b>
<b>Conclusion</b>	<b>23</b>
<b>Note For Contract Users</b>	<b>24</b>
<b>Our Methodology</b>	<b>25</b>
<b>Disclaimers</b>	<b>27</b>

## Disclaimer

This document may contain confidential information about its systems and intellectual property of the customer as well as information about potential vulnerabilities and methods of their exploitation.

The report containing confidential information can be used internally by the customer or it can be disclosed publicly after all vulnerabilities are fixed - upon the decision of the customer.

---

## Document

Name	Smart Contract Code Review and Security Analysis Report of QuickSwap
Platform	Polygon / Solidity
File	QuickSwapRouter.sol
MD5 hash	CF59C28CD06E624025CA40DD73E39213
SHA256 hash	59D5C69CB82E8BF5DA6E4CEA8D58D631F65A0D23C4D6C41110807944A6A1C73E
Date	13/1/2022

## Introduction

RD Auditors (Consultant) were contracted by QuickSwap (Customer) to conduct a Smart Contracts Code Review and Security Analysis. This report represents the findings of the security assessment of the customer`s smart contracts and its code review conducted between 7th - 13th January 2022.

This contract consists of one file.

## Project Scope


The scope of the project is a smart contract. We have scanned this smart contract for commonly known and more specific vulnerabilities, below are those considered (the full list includes but is not limited to):

- Reentrancy
- Timestamp Dependence
- Gas Limit and Loops
- DoS with (Unexpected) Throw
- DoS with Block Gas Limit
- Transaction-Ordering Dependence
- Byte array vulnerabilities
- Style guide violation
- Transfer forwards all gas
- ERC20 API violation
- Malicious libraries
- Compiler version not fixed
- Unchecked external call - Unchecked math
- Unsafe type inference
- Implicit visibility level

---


## Executive Summary

According to the assessment, the customer's solidity smart contract is **well-secured**.



You are Here

 Insecure






 Poorly Secured

 Secure

 Well-Secured

Automated checks are with smartDec, Mythril, Slither and remix IDE. All issues were performed by our team, which included the analysis of code functionality, the manual audit found during automated analysis were manually reviewed and applicable vulnerabilities are presented in the audit overview section. The general overview is presented in the AS-IS section and all issues found are located in the audit overview section.

We found the following;

Total Issues	0
 Critical	0
 High	0
 Medium	0
 Low	0
 Very Low	0

## Code Quality

Please note that within this report IUniswapV2Factory, TransferHelper, IUniswapV2Router02, UniswapV2Library, SafeMath, EIP712MetaTransaction, IERC20, IWETH are taken from the popular OpenZeppelin library.

The libraries within this smart contract are part of a logical algorithm. A library is a different type of smart contract that contains reusable code.

Once deployed on the blockchain (only once), it is assigned to a specific address and its properties/methods can be reused many times by other contracts.

The QuickSwap team has provided scenario and unit test scripts, which would help to determine the integrity of the code in an automated way.



## Documentation

We were given the QuickSwap code as a link:

<https://github.com/QuickSwap/QuickSwap-periphery/blob/feat/EIP712/contracts/QuickSwapRouter.sol>

The hash of that file is mentioned in the table. As mentioned above, It's recommended to write comments in the smart contract code, so anyone can quickly understand the programming flow as well as complex code logic.

Comments are very helpful in understanding the overall architecture of the protocol. It also provides a clear overview of the system components, including helpful details, like the lifetime of the background script.

## Use of Dependencies

As per our observation, the libraries are used in this smart contract infrastructure. Those were based on well known industry standard open source projects and even core code blocks that are written well and systematically.

## AS-IS Overview

### QuickSwapRouter


#### File And Function Level Report

File: QuickSwapRouter.sol  
Contract: QuickSwapRouter  
Import IUniswapV2Factory, TransferHelper, UniswapV2Library, SafeMath, EIP712MetaTransaction, IERC20, IWETH  
Inherit IUniswapV2Router02, EIP712MetaTransaction  
Observation: Passed  
Test Report: Passed

Sl.	Function	Type	Observation	Test Report	Conclusion	Score
1	_addLiquidity	write	Passed	All Passed	No Issue	Passed
2	addLiquidity	write	Passed	All Passed	No Issue	Passed
3	addLiquidityETH	write	Passed	All Passed	No Issue	Passed
4	removeLiquidity	write	Passed	All Passed	No Issue	Passed
5	removeLiquidityETH	write	Passed	All Passed	No Issue	Passed
6	removeLiquidityWithPermit	write	Passed	All Passed	No Issue	Passed
7	removeLiquidityETHWithPermit	write	Passed	All Passed	No Issue	Passed
8	removeLiquidityETHSupportingFeeOnTransferTokens	write	Passed	All Passed	No Issue	Passed
9	removeLiquidityETHWithPermitSupporti	write	Passed	All Passed	No Issue	Passed

	ngFeeOnTransferTokens					
10	_swap	write	Passed	All Passed	No Issue	Passed
11	swapExactTokensForTokens	write	Passed	All Passed	No Issue	Passed
12	swapTokensForExactTokens	write	Passed	All Passed	No Issue	Passed
13	swapExactETHForTokens	write	Passed	All Passed	No Issue	Passed
14	swapTokensForExactETH	write	Passed	All Passed	No Issue	Passed
15	swapExactTokensForrETH	write	Passed	All Passed	No Issue	Passed
16	swapETHForExactTokens	write	Passed	All Passed	No Issue	Passed
17	_swapSupportingFeeOnTransferTokens	write	Passed	All Passed	No Issue	Passed
18	swapExactTokensForrTokensSupportingFeeOnTransferTokens	write	Passed	All Passed	No Issue	Passed
19	swapExactETHForTokensSupportingFeeOnTransferTokens	write	Passed	All Passed	No Issue	Passed
20	swapExactTokensForrETHSupportingFeeOnTransferTokens	write	Passed	All Passed	No Issue	Passed
21	quote	read	Passed	All Passed	No Issue	Passed
22	getAmountOut	read	Passed	All Passed	No Issue	Passed
23	getAmountIn	read	Passed	All Passed	No Issue	Passed
24	getAmountsOut	read	Passed	All Passed	No Issue	Passed
25	getAmountsIn	read	Passed	All Passed	No Issue	Passed

# Code Flow Diagram - QuickSwapRouter

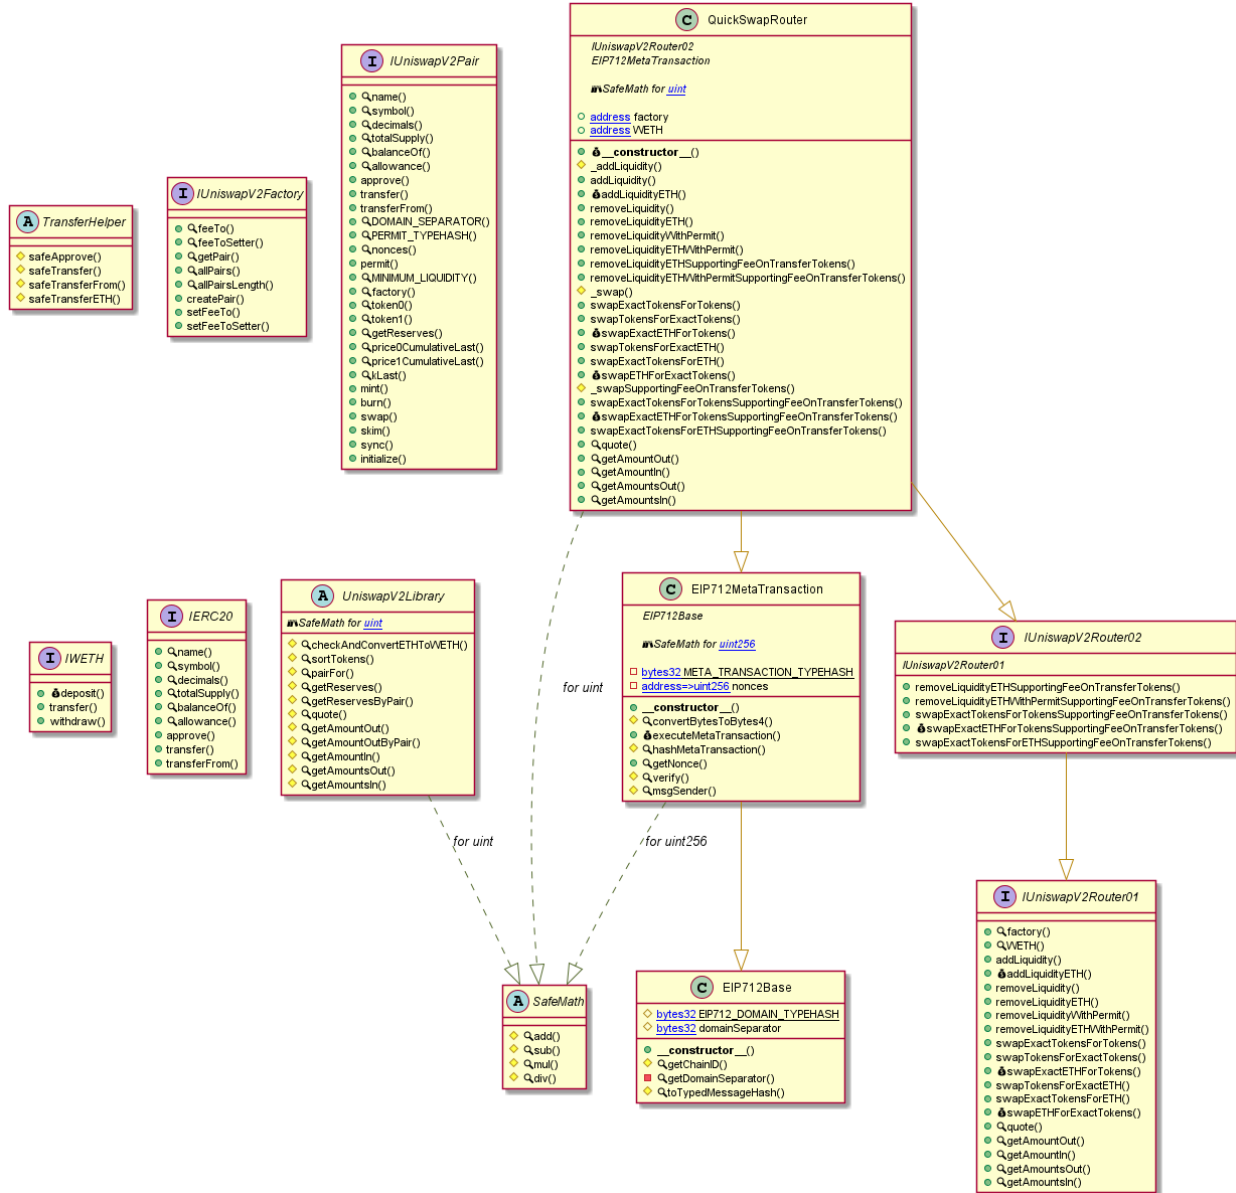

# Slither Results Log

## Slither log >> QuickSwapRouter.sol

```

INFO:Detectors:
QuickSwapRouter.removeLiquidity(address,address,uint256,uint256,uint256,address,uint256) (QuickSwapRouter.sol#603-619) ignores return value by IUniswapV2Pair(pair).transferFrom(msgSender(),pair,liquidity) (QuickSwapRouter.sol#613)
Reference: https://github.com/crytic/slither/wiki/Detector-Documentation#unchecked-transfer
INFO:Detectors:
UniswapV2Library.getAmountsOut(address,uint256,address[]).i (QuickSwapRouter.sol#211) is a local variable never initialized
QuickSwapRouter._swapSupportingFeeOnTransferTokens(address[],address).i (QuickSwapRouter.sol#822) is a local variable never initialized
QuickSwapRouter._swap(uint256[],address[],address).i (QuickSwapRouter.sol#713) is a local variable never initialized
Reference: https://github.com/crytic/slither/wiki/Detector-Documentation#uninitialized-local-variables
INFO:Detectors:
QuickSwapRouter._addLiquidity(address,address,uint256,uint256,uint256,uint256) (QuickSwapRouter.sol#533-560) ignores return value by IUniswapV2Factory(factory).createPair(tokenA,tokenB) (QuickSwapRouter.sol#543)
Reference: https://github.com/crytic/slither/wiki/Detector-Documentation#unused-return
INFO:Detectors:
QuickSwapRouter.constructor(address,address)._factory (QuickSwapRouter.sol#523) lacks a zero-check on :
- factory = _factory (QuickSwapRouter.sol#524)
QuickSwapRouter.constructor(address,address)._WETH (QuickSwapRouter.sol#523) lacks a zero-check on :
- WETH = _WETH (QuickSwapRouter.sol#525)
Reference: https://github.com/crytic/slither/wiki/Detector-Documentation#missing-zero-address-validation
INFO:Detectors:
QuickSwapRouter._swap(uint256[],address[],address) (QuickSwapRouter.sol#712-723) has external calls inside a loop: IUniswapV2Pair(UniswapV2Library.pairFor(factory,input,output)).swap(amount0out,amount1out,to,new bytes(0)) (QuickSwapRouter.sol#719-721)
QuickSwapRouter._swapSupportingFeeOnTransferTokens(address[],address) (QuickSwapRouter.sol#821-838) has external calls inside a loop: (reserve0,reserve1) = pair.getReserves() (QuickSwapRouter.sol#829)
QuickSwapRouter._swapSupportingFeeOnTransferTokens(address[],address) (QuickSwapRouter.sol#821-838) has external calls inside a loop: amountInput = IERC20(input).balanceOf(address(pair)).sub(reserveInput) (QuickSwapRouter.sol#831)
QuickSwapRouter._swapSupportingFeeOnTransferTokens(address[],address) (QuickSwapRouter.sol#821-838) has external calls inside a loop: pair.swap(amount0out,amount1out,to,new bytes(0)) (QuickSwapRouter.sol#836)
Reference: https://github.com/crytic/slither/wiki/Detector-Documentation#calls-inside-a-loop
INFO:Detectors:
Reentrancy in EIP712MetaTransaction.executeMetaTransaction(address,bytes,bytes32,bytes32,uint8) (QuickSwapRouter.sol#459-476):
External calls:
- (success,returnData) = address(this).call(abi.encodePacked(functionSignature,userAddress)) (QuickSwapRouter.sol#471)
Event emitted after the call(s):

- MetaTransactionExecuted(userAddress,msg.sender,functionSignature) (QuickSwapRouter.sol#474)
Reference: https://github.com/crytic/slither/wiki/Detector-Documentation#reentrancy-vulnerabilities-3
INFO:Detectors:
EIP712Base.getChainID() (QuickSwapRouter.sol#407-411) uses assembly
- INLINE ASM (QuickSwapRouter.sol#408-410)
EIP712MetaTransaction.convertBytesToBytes4(bytes) (QuickSwapRouter.sol#449-457) uses assembly
- INLINE ASM (QuickSwapRouter.sol#454-456)
EIP712MetaTransaction.msgSender() (QuickSwapRouter.sol#497-509) uses assembly
- INLINE ASM (QuickSwapRouter.sol#501-504)
Reference: https://github.com/crytic/slither/wiki/Detector-Documentation#assembly-usage
INFO:Detectors:
SafeMath.div(uint256,uint256) (QuickSwapRouter.sol#78-81) is never used and should be removed
TransferHelper.safeApprove(address,address,uint256) (QuickSwapRouter.sol#5-16) is never used and should be removed
UniswapV2Library.getAmountOutByPair(uint256,address,address,address) (QuickSwapRouter.sol#192-195) is never used and should be removed
UniswapV2Library.getReservesByPair(address,address,address) (QuickSwapRouter.sol#170-174) is never used and should be removed
Reference: https://github.com/crytic/slither/wiki/Detector-Documentation#dead-code
INFO:Detectors:
Low level call in TransferHelper.safeApprove(address,address,uint256) (QuickSwapRouter.sol#5-16):
- (success,data) = token.call(abi.encodeWithSelector(0xa9059cbb,to,value)) (QuickSwapRouter.sol#11)
Low level call in TransferHelper.safeTransfer(address,address,uint256) (QuickSwapRouter.sol#18-29):
- (success,data) = token.call(abi.encodeWithSelector(0xa9059cbb,to,value)) (QuickSwapRouter.sol#24)
Low level call in TransferHelper.safeTransferFrom(address,address,address,uint256) (QuickSwapRouter.sol#31-43):
- (success,data) = token.call(abi.encodeWithSelector(0x23b872dd,from,to,value)) (QuickSwapRouter.sol#38)
Low level call in TransferHelper.safeTransferETH(address,uint256) (QuickSwapRouter.sol#45-48):
- (success) = to.call{value: value}(new bytes(0)) (QuickSwapRouter.sol#46)
Low level call in EIP712MetaTransaction.executeMetaTransaction(address,bytes,bytes32,bytes32,uint8) (QuickSwapRouter.sol#459-476):
- (success,returnData) = address(this).call(abi.encodePacked(functionSignature,userAddress)) (QuickSwapRouter.sol#471)
Reference: https://github.com/crytic/slither/wiki/Detector-Documentation#low-level-calls
INFO:Detectors:
Function IUniswapV2Pair.DOMAIN_SEPARATOR() (QuickSwapRouter.sol#99) is not in mixedCase
Function IUniswapV2Pair.PERMIT_TYPEHASH() (QuickSwapRouter.sol#100) is not in mixedCase
Function IUniswapV2Pair.MINIMUM_LIQUIDITY() (QuickSwapRouter.sol#117) is not in mixedCase
Function IUniswapV2Router01.WETH() (QuickSwapRouter.sol#250) is not in mixedCase
Variable QuickSwapRouter.WETH (QuickSwapRouter.sol#516) is not in mixedCase
Reference: https://github.com/crytic/slither/wiki/Detector-Documentation#conformance-to-solidity-naming-conventions

```

```
INFO:Detectors:
Variable IUniswapV2Router01.addLiquidity(address,address,uint256,uint256,uint256,uint256,address,uint256).amountADesired (QuickSwapRouter.sol#255) is too similar to IUniswapV2Router01.addLiquidity(address,address,uint256,uint256,uint256,uint256,address,uint256).amountBDesired (QuickSwapRouter.sol#256)
Variable QuickSwapRouter._addLiquidity(address,address,uint256,uint256,uint256,uint256).amountADesired (QuickSwapRouter.sol#536) is too similar to QuickSwapRouter.addLiquidity(address,address,uint256,uint256,uint256,uint256,address,uint256).amountBDesired (QuickSwapRouter.sol#565)
Variable QuickSwapRouter.addLiquidity(address,address,uint256,uint256,uint256,uint256,address,uint256).amountADesired (QuickSwapRouter.sol#564) is too similar to IUniswapV2Router01.addLiquidity(address,address,uint256,uint256,uint256,uint256,address,uint256).amountBDesired (QuickSwapRouter.sol#256)
Variable QuickSwapRouter._addLiquidity(address,address,uint256,uint256,uint256,uint256).amountADesired (QuickSwapRouter.sol#536) is too similar to QuickSwapRouter._addLiquidity(address,address,uint256,uint256,uint256,uint256).amountBDesired (QuickSwapRouter.sol#537)
Variable QuickSwapRouter._addLiquidity(address,address,uint256,uint256,uint256,uint256).amountADesired (QuickSwapRouter.sol#536) is too similar to IUniswapV2Router01.addLiquidity(address,address,uint256,uint256,uint256,uint256,address,uint256).amountBDesired (QuickSwapRouter.sol#256)
Variable QuickSwapRouter.addLiquidity(address,address,uint256,uint256,uint256,uint256,address,uint256).amountADesired (QuickSwapRouter.sol#564) is too similar to QuickSwapRouter.addLiquidity(address,address,uint256,uint256,uint256,uint256,address,uint256).amountBDesired (QuickSwapRouter.sol#565)
Variable IUniswapV2Router01.addLiquidity(address,address,uint256,uint256,uint256,uint256,address,uint256).amountADesired (QuickSwapRouter.sol#255) is too similar to QuickSwapRouter.addLiquidity(address,address,uint256,uint256,uint256,uint256,address,uint256).amountBDesired (QuickSwapRouter.sol#565)
Variable QuickSwapRouter.addLiquidity(address,address,uint256,uint256,uint256,uint256,address,uint256).amountADesired (QuickSwapRouter.sol#564) is too similar to QuickSwapRouter._addLiquidity(address,address,uint256,uint256,uint256,uint256).amountBDesired (QuickSwapRouter.sol#537)
Variable IUniswapV2Router01.addLiquidity(address,address,uint256,uint256,uint256,uint256,address,uint256).amountADesired (QuickSwapRouter.sol#255) is too similar to QuickSwapRouter._addLiquidity(address,address,uint256,uint256,uint256,uint256).amountBDesired (QuickSwapRouter.sol#537)
Variable QuickSwapRouter._addLiquidity(address,address,uint256,uint256,uint256,uint256).amountA0ptimal (QuickSwapRouter.sol#554) is too similar to QuickSwapRouter._addLiquidity(address,address,uint256,uint256,uint256,uint256).amountB0ptimal (QuickSwapRouter.sol#549)
Reference: https://github.com/crytic/slither/wiki/Detector-Documentation#variable-names-are-too-similar
INFO:Detectors:
executeMetaTransaction(address,bytes,bytes32,bytes32,uint8) should be declared external:
- EIP712MetaTransaction.executeMetaTransaction(address,bytes,bytes32,bytes32,uint8) (QuickSwapRouter.sol#459-476)
quote(uint256,uint256,uint256) should be declared external:
- QuickSwapRouter.quote(uint256,uint256,uint256) (QuickSwapRouter.sol#903-905)

getAmountOut(uint256,uint256,uint256) should be declared external:
- QuickSwapRouter.getAmountOut(uint256,uint256,uint256) (QuickSwapRouter.sol#907-915)
getAmountIn(uint256,uint256,uint256) should be declared external:
- QuickSwapRouter.getAmountIn(uint256,uint256,uint256) (QuickSwapRouter.sol#917-925)
getAmountsOut(uint256,address[]) should be declared external:
- QuickSwapRouter.getAmountsOut(uint256,address[]) (QuickSwapRouter.sol#927-935)
getAmountsIn(uint256,address[]) should be declared external:
- QuickSwapRouter.getAmountsIn(uint256,address[]) (QuickSwapRouter.sol#937-945)
Reference: https://github.com/crytic/slither/wiki/Detector-Documentation#public-function-that-could-be-declared-external
INFO:Slither:QuickSwapRouter.sol analyzed (12 contracts with 75 detectors), 45 result(s) found
INFO:Slither:Use https://crytic.io/ to get access to additional detectors and Github integration
```

---

## Solidity Static Analysis

Security

**Check-effects-interaction:** ✕

INTERNAL ERROR in module Check-effects-interaction: IdentNode is undefined  
Pos: not available

**Inline assembly:** ✕

The Contract uses inline assembly, this is only advised in rare cases.  
Additionally static analysis modules do not parse inline Assembly, this can lead to wrong analysis results.  
[more](#)  
Pos: 408:8:

**Block timestamp:** ✕

Use of "block.timestamp": "block.timestamp" can be influenced by miners to a certain degree.  
That means that a miner can "choose" the block.timestamp, to a certain degree, to change the outcome of a transaction in the mined block.  
[more](#)  
Pos: 519:28:

**Low level calls:** ✕

Use of "call": should be avoided whenever possible.  
It can lead to unexpected behavior if return value is not handled properly.  
Please use Direct Calls via specifying the called contract's interface.  
[more](#)  
Pos: 46:27:

**Low level calls:** ✕

Use of "call": should be avoided whenever possible.  
It can lead to unexpected behavior if return value is not handled properly.  
Please use Direct Calls via specifying the called contract's interface.  
[more](#)  
Pos: 471:50:



## Gas &amp; Economy

**Gas costs:** ✕

Gas requirement of function QuickSwapRouter.quote is infinite:

If the gas requirement of a function is higher than the block gas limit, it cannot be executed.

Please avoid loops in your functions or actions that modify large areas of storage  
(this includes clearing or copying arrays in storage)

Pos: 177:4:

**Gas costs:** ✕

Gas requirement of function QuickSwapRouter.addLiquidityETH is infinite:

If the gas requirement of a function is higher than the block gas limit, it cannot be executed.

Please avoid loops in your functions or actions that modify large areas of storage  
(this includes clearing or copying arrays in storage)

Pos: 577:4:

**Gas costs:** ✕

Gas requirement of function QuickSwapRouter.removeLiquidity is infinite:

If the gas requirement of a function is higher than the block gas limit, it cannot be executed.

Please avoid loops in your functions or actions that modify large areas of storage  
(this includes clearing or copying arrays in storage)

Pos: 603:4:

**Gas costs:** ✕

Gas requirement of function

QuickSwapRouter.swapExactTokensForTokensSupportingFeeOnTransferTokens is infinite:

If the gas requirement of a function is higher than the block gas limit, it cannot be executed.

Please avoid loops in your functions or actions that modify large areas of storage  
(this includes clearing or copying arrays in storage)

Pos: 839:4:

**Gas costs:** ✕

Gas requirement of function QuickSwapRouter.swapExactETHForTokensSupportingFeeOnTransferTokens is infinite:

If the gas requirement of a function is higher than the block gas limit, it cannot be executed.

Please avoid loops in your functions or actions that modify large areas of storage  
(this includes clearing or copying arrays in storage)

Pos: 856:4:

**For loop over dynamic array:** ✕

Loops that do not have a fixed number of iterations, for example, loops that depend on storage values, have to be used carefully. Due to the block gas limit, transactions can only consume a certain amount of gas. The number of iterations in a loop can grow beyond the block gas limit which can cause the complete contract to be stalled at a certain point.

Additionally, using unbounded loops incurs in a lot of avoidable gas costs. Carefully test how many items at maximum you can pass to such functions to make it successful.

[more](#)

Pos: 822:8:

**For loop over dynamic array:** ✕

Loops that do not have a fixed number of iterations, for example, loops that depend on storage values, have to be used carefully. Due to the block gas limit, transactions can only consume a certain amount of gas. The number of iterations in a loop can grow beyond the block gas limit which can cause the complete contract to be stalled at a certain point.

Additionally, using unbounded loops incurs in a lot of avoidable gas costs. Carefully test how many items at maximum you can pass to such functions to make it successful.

[more](#)

Pos: 835:25:

## ERC

**ERC20:** ✕

ERC20 contract's "decimals" function should have "uint8" as return type

[more](#)

Pos: 90:4:

**ERC20:** ✕

ERC20 contract's "decimals" function should have "uint8" as return type

[more](#)

Pos: 239:4:

## Miscellaneous

**Constant/View/Pure functions:** ✕

INTERNAL ERROR in module Constant/View/Pure functions: IdentNode is undefined

Pos: not available

**Similar variable names:** ✕

QuickSwapRouter.\_addLiquidity(address,address,uint256,uint256,uint256,uint256) : Variables have very similar names "reserveA" and "reserveB". Note: Modifiers are currently not considered by this static analysis.

Pos: 545:9:

**Similar variable names:** ✕

QuickSwapRouter.\_addLiquidity(address,address,uint256,uint256,uint256,uint256) : Variables have very similar names "reserveA" and "reserveB". Note: Modifiers are currently not considered by this static analysis.

Pos: 545:24:

**Similar variable names:** ✕

QuickSwapRouter.\_addLiquidity(address,address,uint256,uint256,uint256,uint256) : Variables have very similar names "reserveA" and "reserveB". Note: Modifiers are currently not considered by this static analysis.

Pos: 546:12:

**Similar variable names:** ✕

QuickSwapRouter.\_addLiquidity(address,address,uint256,uint256,uint256,uint256) : Variables have very similar names "reserveA" and "reserveB". Note: Modifiers are currently not considered by this static analysis.

Pos: 546:29:

**Similar variable names:** ✕

QuickSwapRouter.\_swapSupportingFeeOnTransferTokens(address[],address) : Variables have very similar names "pair" and "path". Note: Modifiers are currently not considered by this static analysis.

Pos: 823:47:

**Similar variable names:** ✕

QuickSwapRouter.\_swapSupportingFeeOnTransferTokens(address[],address) : Variables have very similar names "pair" and "path". Note: Modifiers are currently not considered by this static analysis.

Pos: 823:56:

**Similar variable names:** ✕

QuickSwapRouter.getAmountsOut(uint256,address[]) : Variables have very similar names "amountIn" and "amounts". Note: Modifiers are currently not considered by this static analysis.

Pos: 934:55:

**No return:** ✕

INTERNAL ERROR in module No return: IdentNode is undefined

Pos: not available

**Guard conditions:** ✕

Use "assert(x)" if you never ever want x to be false, not in any circumstance (apart from a bug in your code). Use "require(x)" if x can be false, due to e.g. invalid input or a failing external component.

[more](#)

Pos: 12:8:

**Guard conditions:** ✕

Use "assert(x)" if you never ever want x to be false, not in any circumstance (apart from a bug in your code). Use "require(x)" if x can be false, due to e.g. invalid input or a failing external component.

[more](#)

Pos: 732:8:

**Guard conditions:** ✕

Use "assert(x)" if you never ever want x to be false, not in any circumstance (apart from a bug in your code). Use "require(x)" if x can be false, due to e.g. invalid input or a failing external component.

[more](#)

Pos: 746:8:

**Guard conditions:** ✕

Use "assert(x)" if you never ever want x to be false, not in any circumstance (apart from a bug in your code). Use "require(x)" if x can be false, due to e.g. invalid input or a failing external component.

[more](#)

Pos: 760:8:

**Guard conditions:** 

Use "assert(x)" if you never ever want x to be false, not in any circumstance (apart from a bug in your code). Use "require(x)" if x can be false, due to e.g. invalid input or a failing external component.

[more](#)

Pos: 871:8:

**Guard conditions:** 

Use "assert(x)" if you never ever want x to be false, not in any circumstance (apart from a bug in your code). Use "require(x)" if x can be false, due to e.g. invalid input or a failing external component.

[more](#)

Pos: 874:8:

**Guard conditions:** 

Use "assert(x)" if you never ever want x to be false, not in any circumstance (apart from a bug in your code). Use "require(x)" if x can be false, due to e.g. invalid input or a failing external component.

[more](#)


Pos: 891:8:

**Guard conditions:** 

Use "assert(x)" if you never ever want x to be false, not in any circumstance (apart from a bug in your code). Use "require(x)" if x can be false, due to e.g. invalid input or a failing external component.

[more](#)

Pos: 897:8:

**Data truncated:** 

Division of integer values yields an integer value again. That means e.g.  $10 / 100 = 0$  instead of 0.1 since the result is an integer again. This does not hold for division of (only) literal values since those yield rational constants.

Pos: 189:20:

**Data truncated:** 

Division of integer values yields an integer value again. That means e.g.  $10 / 100 = 0$  instead of 0.1 since the result is an integer again. This does not hold for division of (only) literal values since those yield rational constants.

Pos: 203:20:

---

## Severity Definitions

Risk Level	Description
Critical	Critical vulnerabilities are usually straightforward to exploit and can lead to lost tokens etc.
High	High level vulnerabilities are difficult to exploit; however, they also have a significant impact on smart contract execution, e.g. public access to crucial functions.
Medium	Medium level vulnerabilities are important to fix; however, they cannot lead to lost tokens.
Low	Low level vulnerabilities are most related to outdated, unused etc. These code snippets cannot have a significant impact on execution.
Lowest Code Style/ Best Practice	Lowest level vulnerabilities, code style violations and information statements cannot affect smart contract execution and can be ignored.

## Audit Findings

### Critical:

No critical severity vulnerabilities were found.

### High:

No high severity vulnerabilities were found.

### Medium:

No medium severity vulnerabilities were found.

### Low:

No low severity vulnerabilities were found.

### Very Low:

No very low severity vulnerabilities were found.

## Conclusion

We were given a contract file and have used all possible tests based on the given object. The contract is written systematically, so it is now ready to go for production.

We have used all the latest static tools and manual observations to cover maximum possible test cases to scan everything.

The security state of the reviewed contract is now “well secured”



## Note For Contract Users

Owner has full control over the smart contract. Thus, technical auditing does not guarantee the project's ethical side.

Please do your due diligence before investing. Our audit report is never an investment advice.

## Our Methodology

We like to work with a transparent process and make our reviews a collaborative effort. The goals of our security audits are to improve the quality of systems we review and aim for sufficient remediation to help protect users. The following is the methodology we use in our security audit process.

### Manual Code Review

In manually reviewing all of the code, we look for any potential issues with code logic, error handling, protocol and header parsing, cryptographic errors, and random number generators. We also watch for areas where more defensive programming could reduce the risk of future mistakes and speed up future audits. Although our primary focus is on the in-scope code, we examine dependency code and behavior when it is relevant to a particular line of investigation.

### Vulnerability Analysis

Our audit techniques included manual code analysis, user interface interaction, and whitebox penetration testing. We look at the project's web site to get a high level understanding of what functionality the software under review provides. We then meet with the developers to gain an appreciation of their vision of the software. We install and use the relevant software, exploring the user interactions and roles. While we do this, we brainstorm threat models and attack surfaces. We read design documentation, review other audit results, search for similar projects, examine source code dependencies, skim open issue tickets, and generally investigate details other than the implementation.

## Documenting Results

We follow a conservative, transparent process for analyzing potential security vulnerabilities and seeing them through successful remediation. Whenever a potential issue is discovered, we immediately create an Issue entry for it in this document, even though we have not yet verified the feasibility and impact of the issue. This process is conservative because we document our suspicions early even if they are later shown to not represent exploitable vulnerabilities. We generally follow a process of first documenting the suspicion with unresolved questions, then confirming the issue through code analysis, live experimentation, or automated tests. Code analysis is the most tentative, and we strive to provide test code, log captures, or screenshots demonstrating our confirmation. After this we analyse the feasibility of an attack in a live system.

## Suggested Solutions

We search for immediate mitigations that live deployments can take, and finally we suggest the requirements for remediation engineering for future releases. The mitigation and remediation recommendations should be scrutinised by the developers and deployment engineers, and successful mitigation and remediation is an ongoing collaborative process after we deliver our report, and before the details are made public.

---

## Disclaimers

### RD Auditors Disclaimer

The smart contracts given for audit have been analysed in accordance with the best industry practices at the date of this report, in relation to: cybersecurity vulnerabilities and issues in smart contract source code, the details of which are disclosed in this report, (Source Code); the Source Code compilation, deployment and functionality (performing the intended functions).

Because the total number of test cases are unlimited, the audit makes no statements or warranties on the security of the code. It also cannot be considered as a sufficient assessment regarding the utility and safety of the code, bugfree status or any other statements of the contract. While we have done our best in conducting the analysis and producing this report, it is important to note that you should not rely on this report only - we recommend proceeding with several independent audits and a public bug bounty program to ensure security of smart contracts.

### Technical Disclaimer

Smart contracts are deployed and executed on the blockchain. The platform, its programming language, and other software related to the smart contract can have their own vulnerabilities that can lead to hacks. Thus, the audit can't guarantee explicit security of the audited smart contracts.



**Email: [info@rdauditors.com](mailto:info@rdauditors.com)**

**Website: [www.rdauditors.com](http://www.rdauditors.com)**

